


Read before installation.

Soft luggage rack

All bolts have to be finally tighten after installation all parts on vehicle.

	Steel 8,8	Steel 10,9	Steel 12,9
M 4	2,7	4	4,9
M 5	5,5	8	9,8
M 6	9,7	13,7	16
M 8	23	33	40
M 10	47	66	83
M 12	80	116	150
M 14	130	184	240
M 16	196	287	350
M 18	270	395	490
M 20	385	560	690

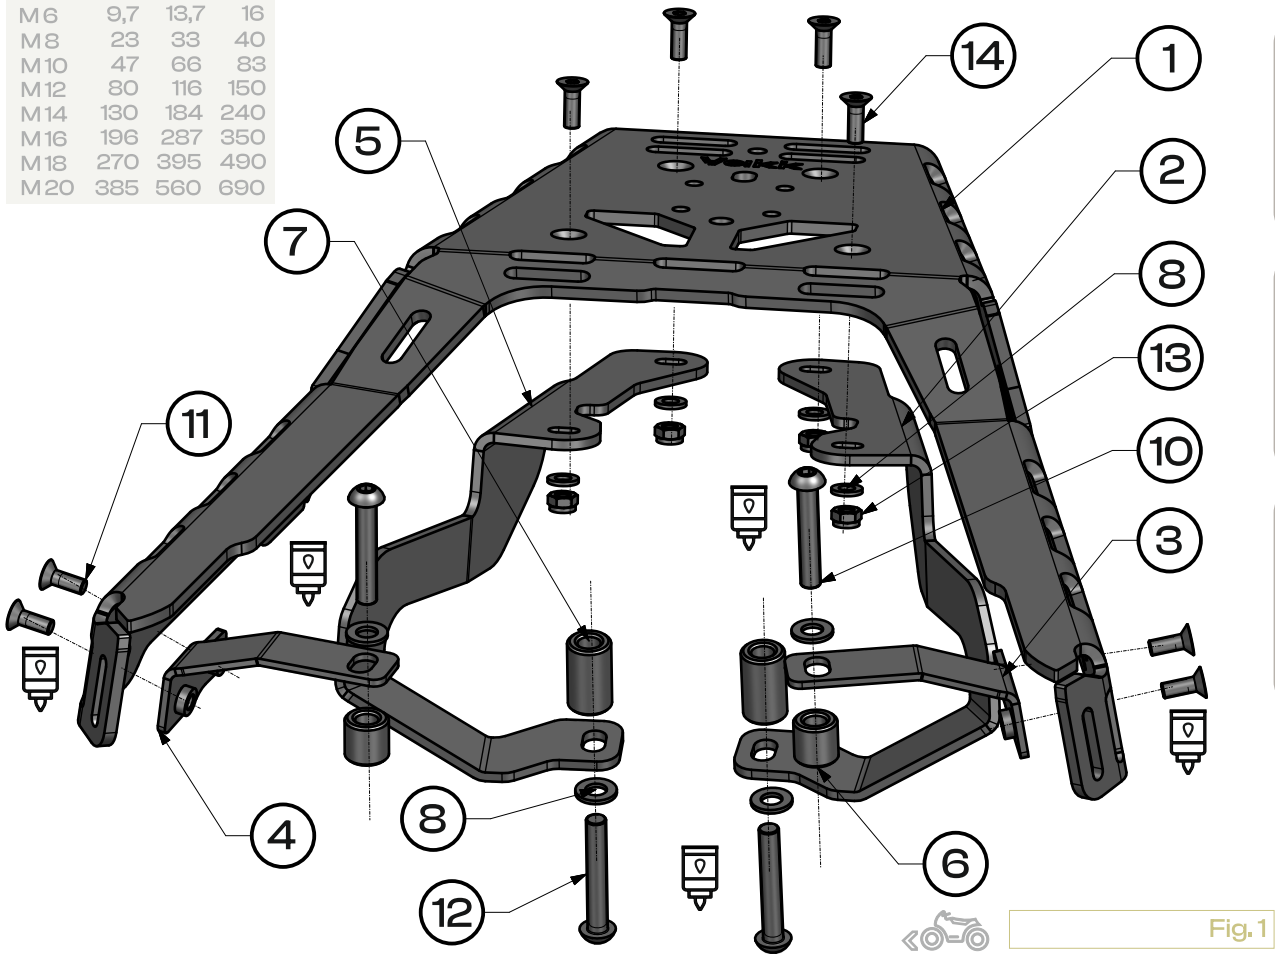


ID:3140725

1 Luggage Plate




1x

2 LH Rear Bracket




1x

3 LH Front Bracket



1x

4 RH Front Bracket




1x

5 RH Rear Bracket




1x

6 Spacer



D17xd9xH17 2x

7 Spacer



D17xd9xH29 2x

8 Washer




M6-DIN 125 4x

9 Washer



M8-DIN 125 4x

10 Bolt




M8x45-DIN 7380 2x

11 Bolt




M6x16 -DIN 7991 4x

12 Bolt



M8x50-DIN 7380 2x

13 Nut



M6-DIN 985 4x

14 Bolt



M6x18 -DIN 7991 4x

 **Fig.1**

NOTICE
YAKK EXP products are designed for demanding off-road use and provide increased protection compared to original or competing equipment. Riding in challenging terrain, particularly when overcoming extreme obstacles, requires appropriate skills, experience, and proper assessment of the capabilities of the motorcycle and its protective components. Please note that no protective component can guarantee complete protection of the motorcycle against damage. Improper use, unforeseen events, exceptionally severe impacts, or contact with obstacles capable of causing permanent damage may exceed the protective capabilities of the products and result in damage to the products themselves or to other motorcycle components.

The manufacturer cannot be held responsible for damage resulting from loads exceeding the product's structural and protective capabilities.

 one person

 use a medium-strength

 tighten with torque

OEM Original Equipment Manufacturer



!!! Initially, attach the screws loosely.

After assembling everything together, tighten them with the appropriate force.

follow  yakkexp join #yakkherd

1. Remove the the passenger seats. [Fig. 1]

2. Unscrew the OEM bolts. Install and loosely fasten the LH Front Bracket [3] and RH Front Bracket [4] using bolts [10], spacers [6], and washers [9]. [Fig. 1], [Fig. 3] Use medium-strength adhesive.

3. Unscrew the OEM bolts [Fig. 4].




Fig. 2

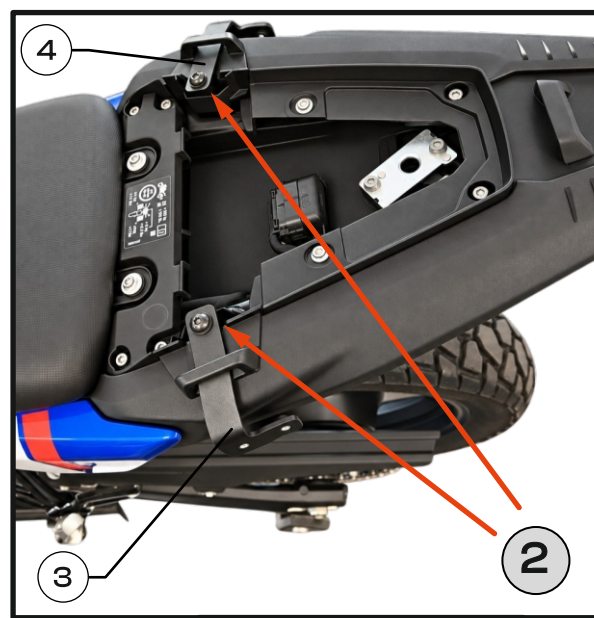


Fig. 3

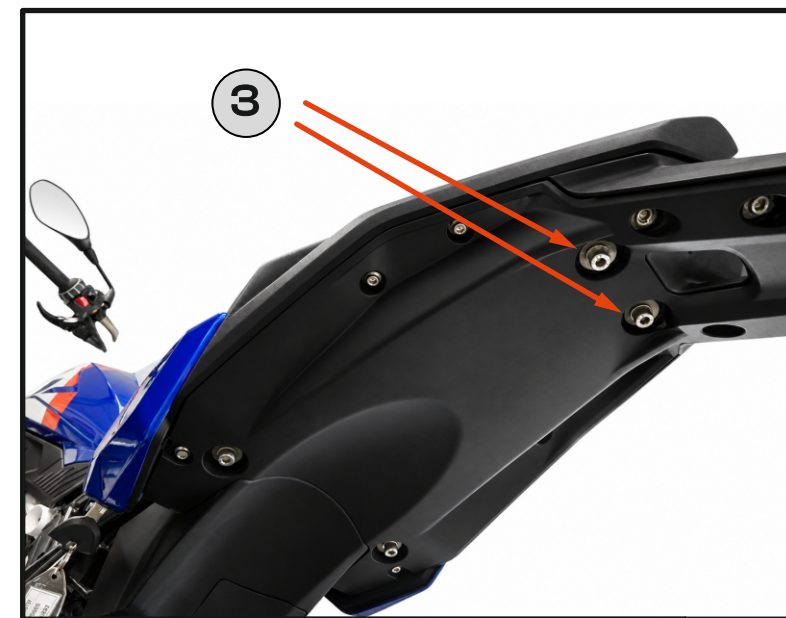


Fig. 4



!!! Initially, attach the screws loosely.

After assembling everything together, tighten them with the appropriate force.

follow  yakkexp join #yakkherd

4. Install and loosely fasten the LH Rear Bracket [2] and RH Rear Bracket [5] using bolts [12], spacers [7], and washers [9]. **[Fig. 1], [Fig. 7], [Fig. 8]** Use medium-strength adhesive.
5. Install and loosely fasten the Luggage Plate [1] using bolts [11]. **[Fig. 1], [Fig. 6]** Use medium-strength adhesive.
6. Attach the Luggage Plate [1] at the rear using bolts [14], with washers [8] and nuts [13] fitted from underneath. **[Fig. 1], [Fig. 6]**
7. Align the **rack** plate with the motorcycle axis and tighten all bolts to the specified torque. **[Fig. 9]**
8. Reinstall the passenger seat. **[Fig. 9]**

